



HTIB 1002UK

5.1 CH SPEAKER SYSTEM



Please read this User manual carefully to ensure proper use of this product and keep this manual for further reference

Table of Contents

- SAFETY INSTRUCTIONS ----- 1-2
- ACCESSORIES ----- 3
- INTRODUCTION ----- 4-5
- WARNING ----- 6
- REMOTE CONTROL ----- 7
- CONNECTION ----- 8
- CONNECTION EQUIPMENT ----- 9
- CONNECTION TO TERMINALS ----- 10
- OPERATING ----- 11
- SPECIFICATIONS ----- 12

IMPORTANT SAFETY INSTRUCTIONS

CAUTION:
Please read and observe all warnings and instructions given in this user manual and those marked on the unit. Retain this manual for future reference. This set has been designed and manufactured to assure personal safety. Improper use can result in electric shock or fire hazard. The safeguards incorporated in this unit will protect you if you observe the following procedures for installation, use and servicing. This unit is fully transistorized and does not contain any parts that can be repaired by the user.

Do not remove the cabinet cover, or you may be exposed to dangerous voltage. Refer servicing to qualified service personnel only.

Please read the operating instructions carefully, and follow all the operating and other instructions.

Power sources
This product should be operated only from the type of power source indicated on the marking label. For the usage of the battery power and other power source, refer to the operating instructions.

Ventilation
Slots and opening in the cabinet are provided for ventilation and to ensure reliable operating of the product and to protect it from overheating, and these openings must not be blocked or covered. This product should not be placed on the bed or sofa, rug or other.

Heat sources
The product should be situated away from the heat source such as radiators, stoves or other products that produce heat.

Water and moisture
Do not use this product near water-for example, near a bathtub, wash bowl, kitchen sink, or laundry tub; in basement; or near a swimming pool and the like.

Cleaning
Unplug this product from the outlet before cleaning. Do not use liquid cleaner or aerosol cleaners. Use a damp cloth for cleaning.

Over loading
Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.

ACCESSORIES

- Sub-woofer **1PCS**
- Center **1PCS**
- Satellite **4PCS**
- Link cable for Front **2PC(3m)**
- Link cable for Center **1PC(3m)**
- Link cable for Surround **2PC(8m)**
- Input cable **3PCS**
- Remote Control **1PCS**
- 1.5V AAA Battery **2PCS**
- Instruction Manual **1PCS**

INTRODUCTION

HOME THEATRE SYSTEM Active Sub-woofer With Satellite Speakers Operating Manual

Congratulations On Your Purchase!

Your new Home theatre with active Sub-woofer system is designed to deliver maximum enjoyment. Please take a few moments to read this manual thoroughly. It will explain the features and operation of your unit and help ensure a trouble free installation.

Unpacking and installation

Please unpack your unit carefully. We recommend that you save the carton and packing material. they will be helpful if you ever need to move your unit and may be required if you ever need to return it for service. To avoid damage, never place the unit near radiators, in front of heating vents, in direct sun light, in excessively humid or near water.

INTRODUCTION

For your safety

When disconnecting the AC power cord, pull the power plug. Do not pull the cord by itself. Never handle the AC power plug with wet hands, as this could cause fire or electric shock. Avoid overloading AC power plugs and extension cords beyond their capacity, as this could cause fire, when not in use, unplug the AC power cord from the AC power outlet if the unit will not be used for several months or more.

Damage requiring service

Do not attempt to repair the unit yourself, it should be done by a qualified service technician.

Caution

To reduce the risk of electric shock, do not remove front or back cover. If this unit is used at high volume, the area around the heat sink will become very hot, Do not touch this area, or allow anything to block the ventilation. Keep the sub-woofer box dry and enough space for ventilation, do not put vases or other articles upon it.

Warning

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

Before connecting the AC Cord

Check that the voltage shown on the rear panel matches your local voltage.


AC 230V

This symbol means that the product is double insulated and you do not need an earth connection.

This symbol means that this product keeps to the European safety and electrical interference directives.


REMOTE CONTROL

1. AUX. Game channel and DVD channel selector
2. Memo 1
3. Memo 2
4. Memo 3
5. Center volume Up
6. Center volume Down
7. Subwoofer volume Up
8. Subwoofer volume Down
9. Surround volume Up
10. Surround volume Down
11. Master volume Up
12. Master volume Down
13. Mute
14. St.by

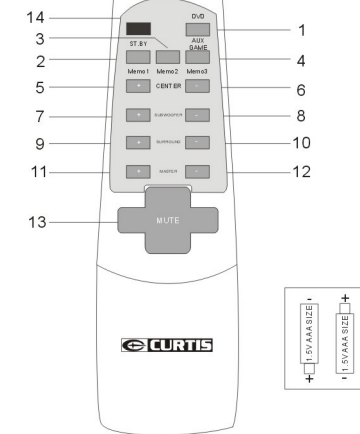

Selective

CONNECTION

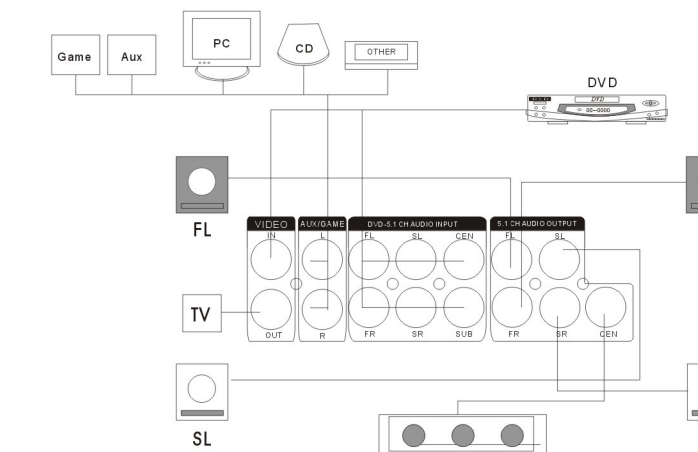

CONNECTING EQUIPMENT

Jacks and plugs of the connecting cord are color-coded as follows:
Red jacks and plugs: For the right channel of audio signals
White jack and plugs: For the left channel of audio signals

NOTE:

Insert the plugs fully into the jacks. Loose connections may produce a humming sound or other noise interference.

IMPORTANT:

Connect the speakers and all other external equipment and lastly connect the AC power cord.

CONNECTING +TO+, -TO- TERMINALS

NOTE

Do not leave objects generating magnetism near the speakers.

NOTE

DTS surround dolby prologic and dolby digital surround depends on DVD player or any one coder. This speaker system is providing 5.1 virtual surround sound effect.

OPERATING

Power-on

(be sure to check the connections before you power on your system)

1. plug the AC cord to AC socket.
2. press **POWER** button on the rear panel
3. 5.1LED lights on.
4. press INPUT button to select the required input sources

Source input

This function could ensure the shift of audio. You may choose each mode of

- 5.1.S.Vol and 2.1 by pressing 5.1-2.1 Button on the remote control or front panel.

SPECIFICATIONS

Total output power:150W

Impedance :Subwoofer-4OHM, Satellite-8OHM

drive unit : subwoofer: 4"
:front : 3"
:center : 3"
:surround : 3"

frequency response:30Hz-20KHz

separation of satellite:45dB

S/N :80dB

Power supply:AC230v/50Hz

